

15

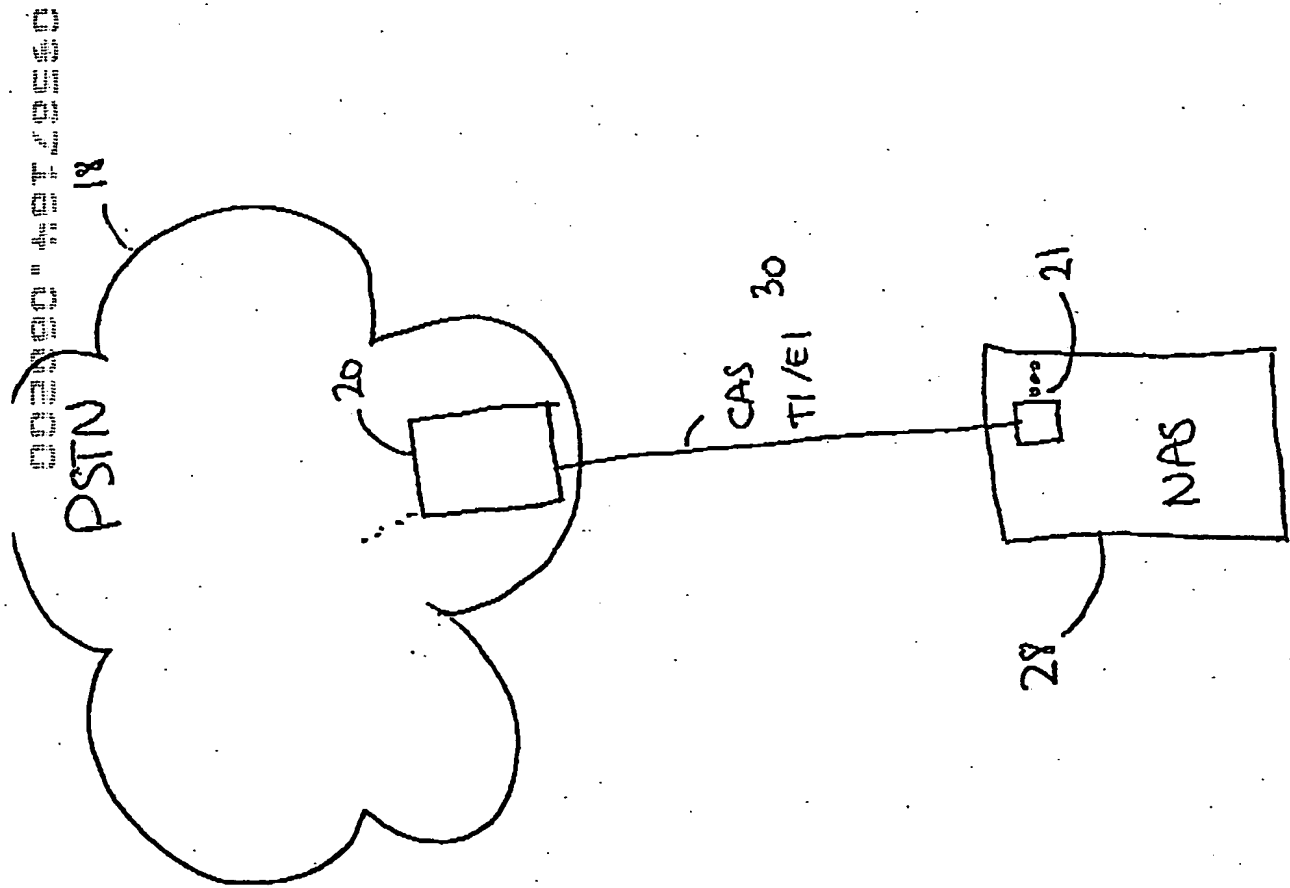


Fig. 2

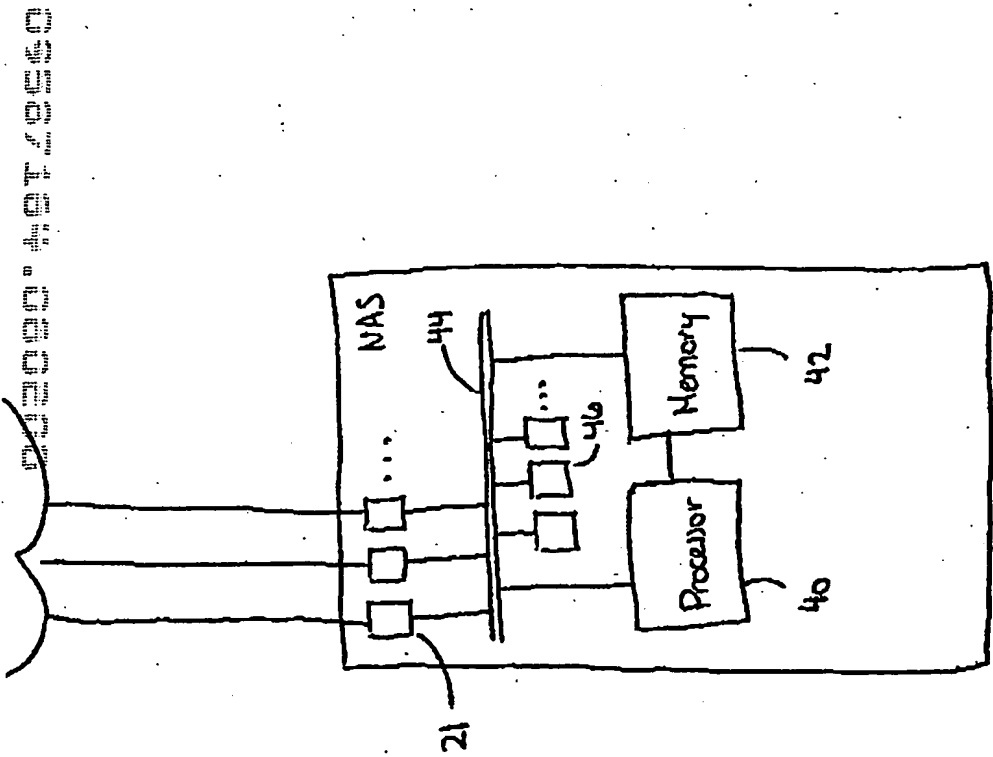


Fig 3

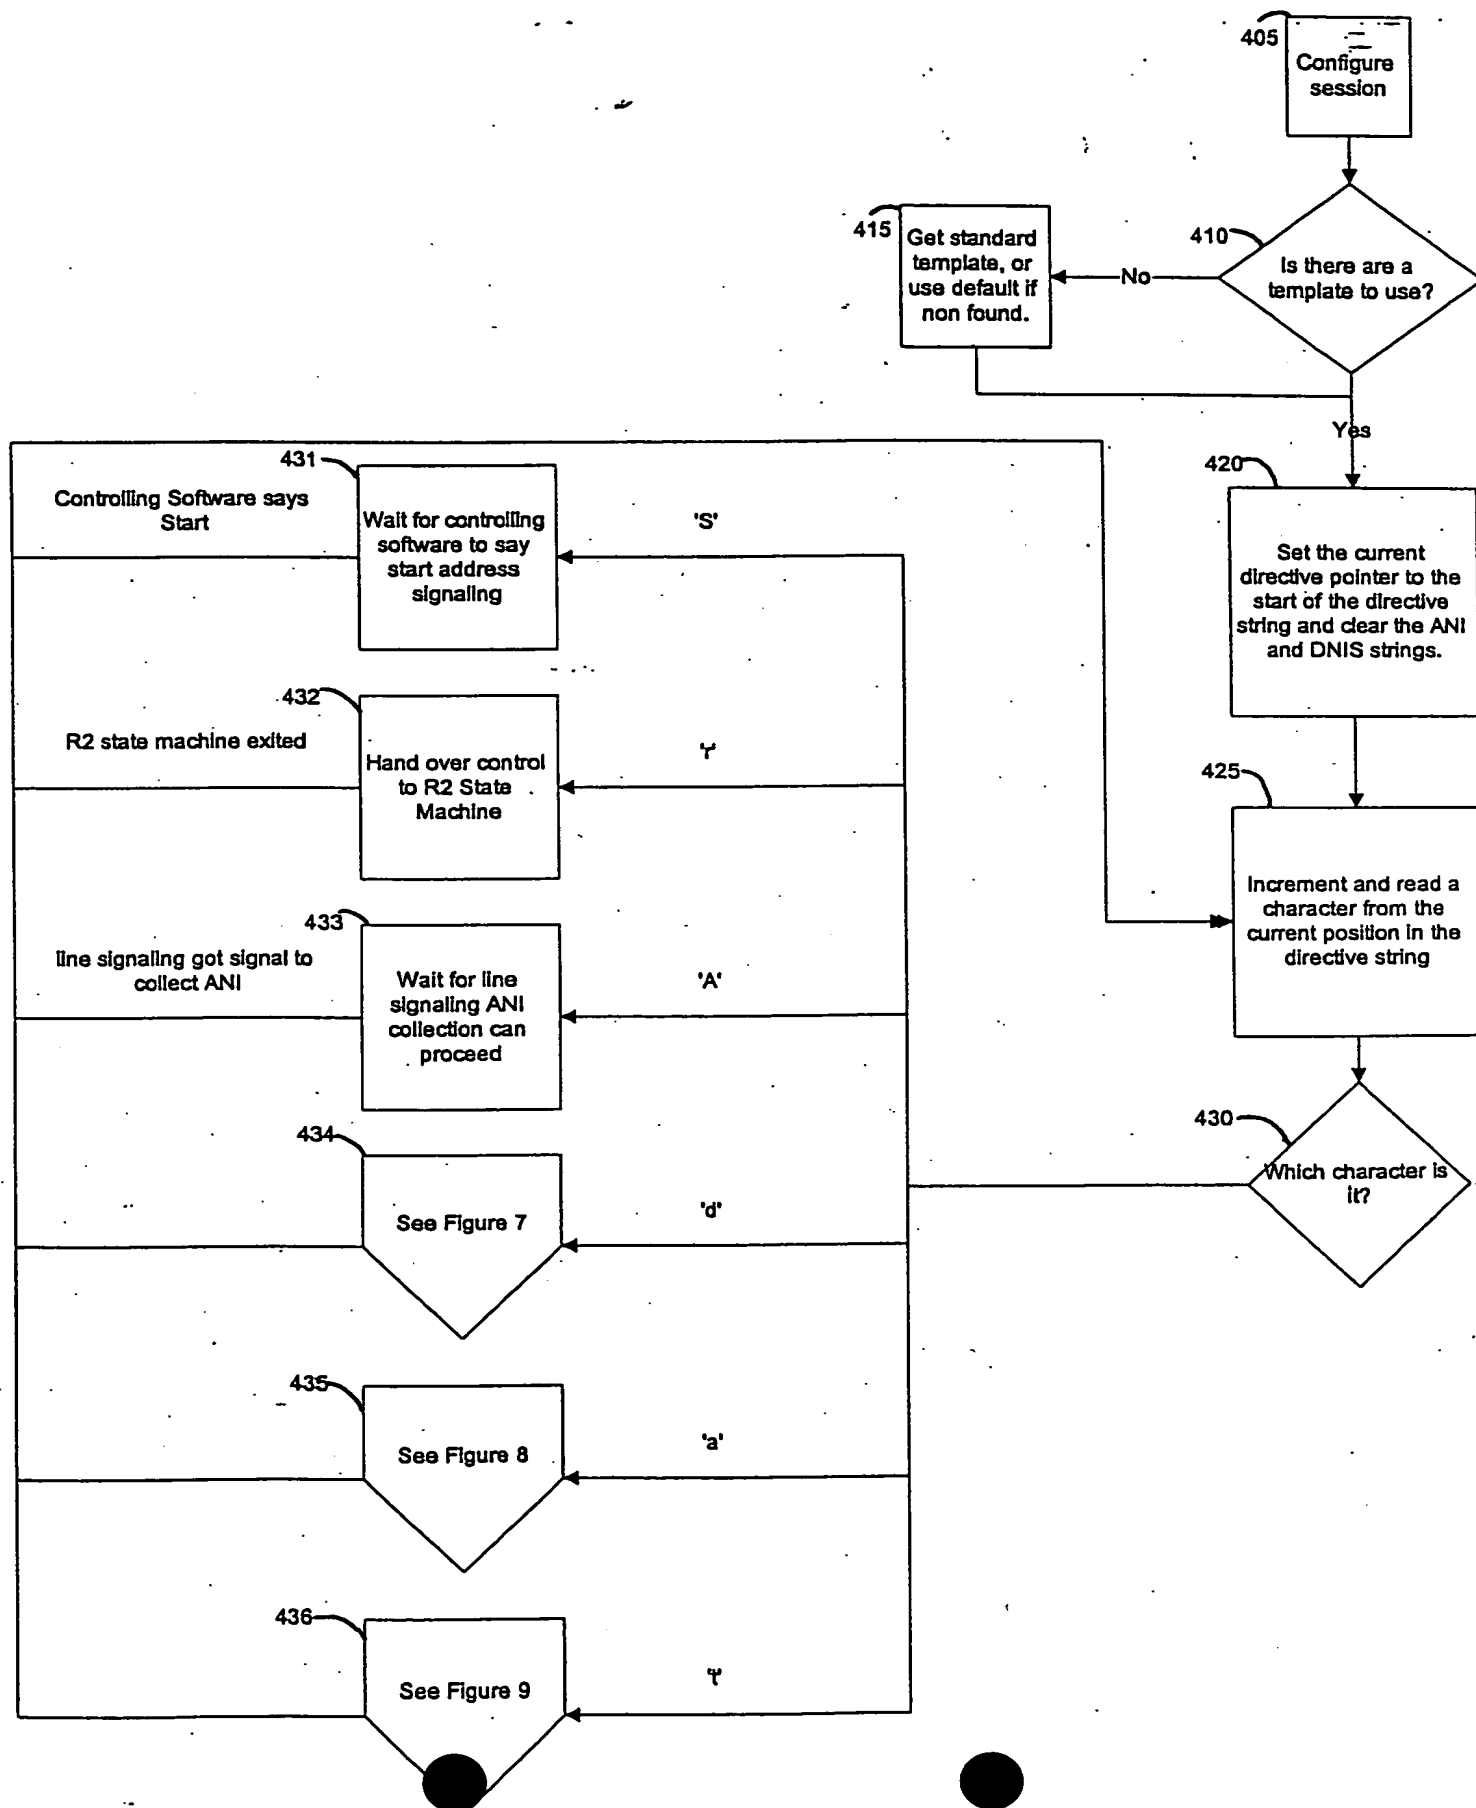


Figure 4


```

graph TD
    425[425 Increment and read a character from the current position in the directive string] --> 430{430 Which character is it?}
    430 -- 'o' --> 437[437 Wait for the timer to expire]
    430 -- 'T' --> 438[438 Set ignore non digits to true]
    430 -- 'T' --> 439[439 Set ignore non digits to false]
    430 -- 'N' --> 440[440 Send a message to the line signaling to send the requesting ANI signal]
    430 -- 'D' --> 441[441 Wait until we have been given the DNIS to dial]
    430 -- 'K' --> 442[442 Send a message to the line signaling to send the detecting KP tone signal]
    430 -- 'w' --> 443[443 Wait until a call progress tone with the characteristics of a dialtone are detected by the DSP]
    430 -- 'n' --> 444[444 Notify controlling software of the detected addresses]
    437 --> 425
    438 --> 439
    439 --> 440
    440 --> 441
    441 --> 442
    442 --> 443
    443 --> 444
    444 --> 425


```

Figure 5

000004070000

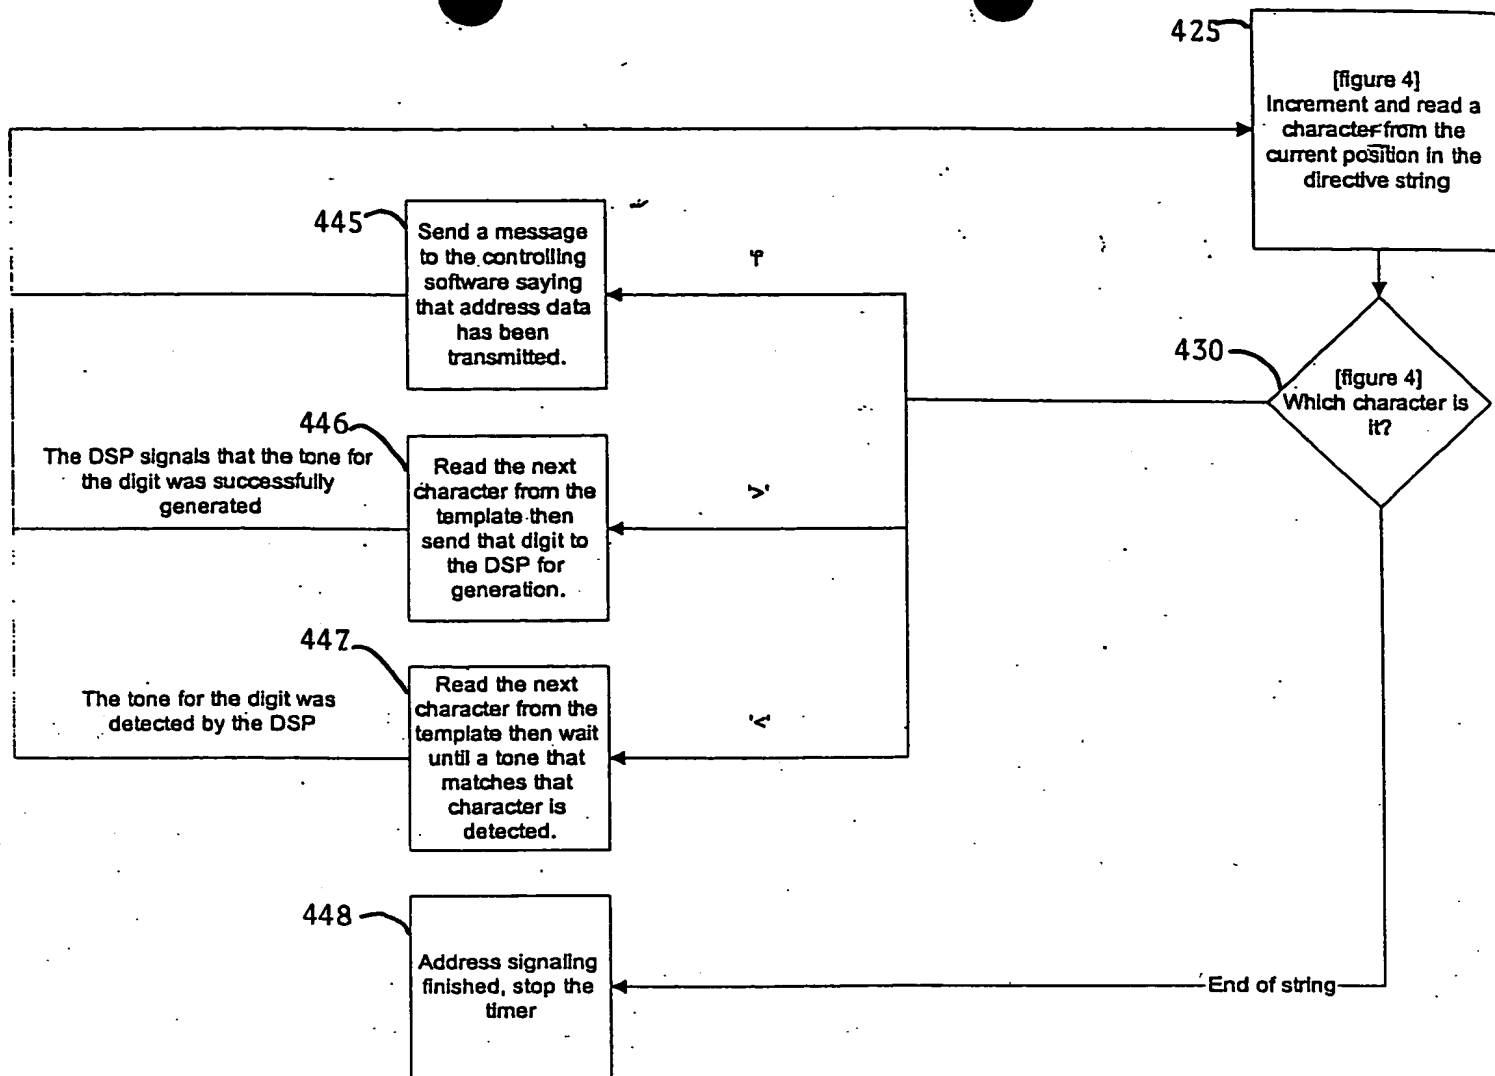

2025 RELEASE UNDER E.O. 14176

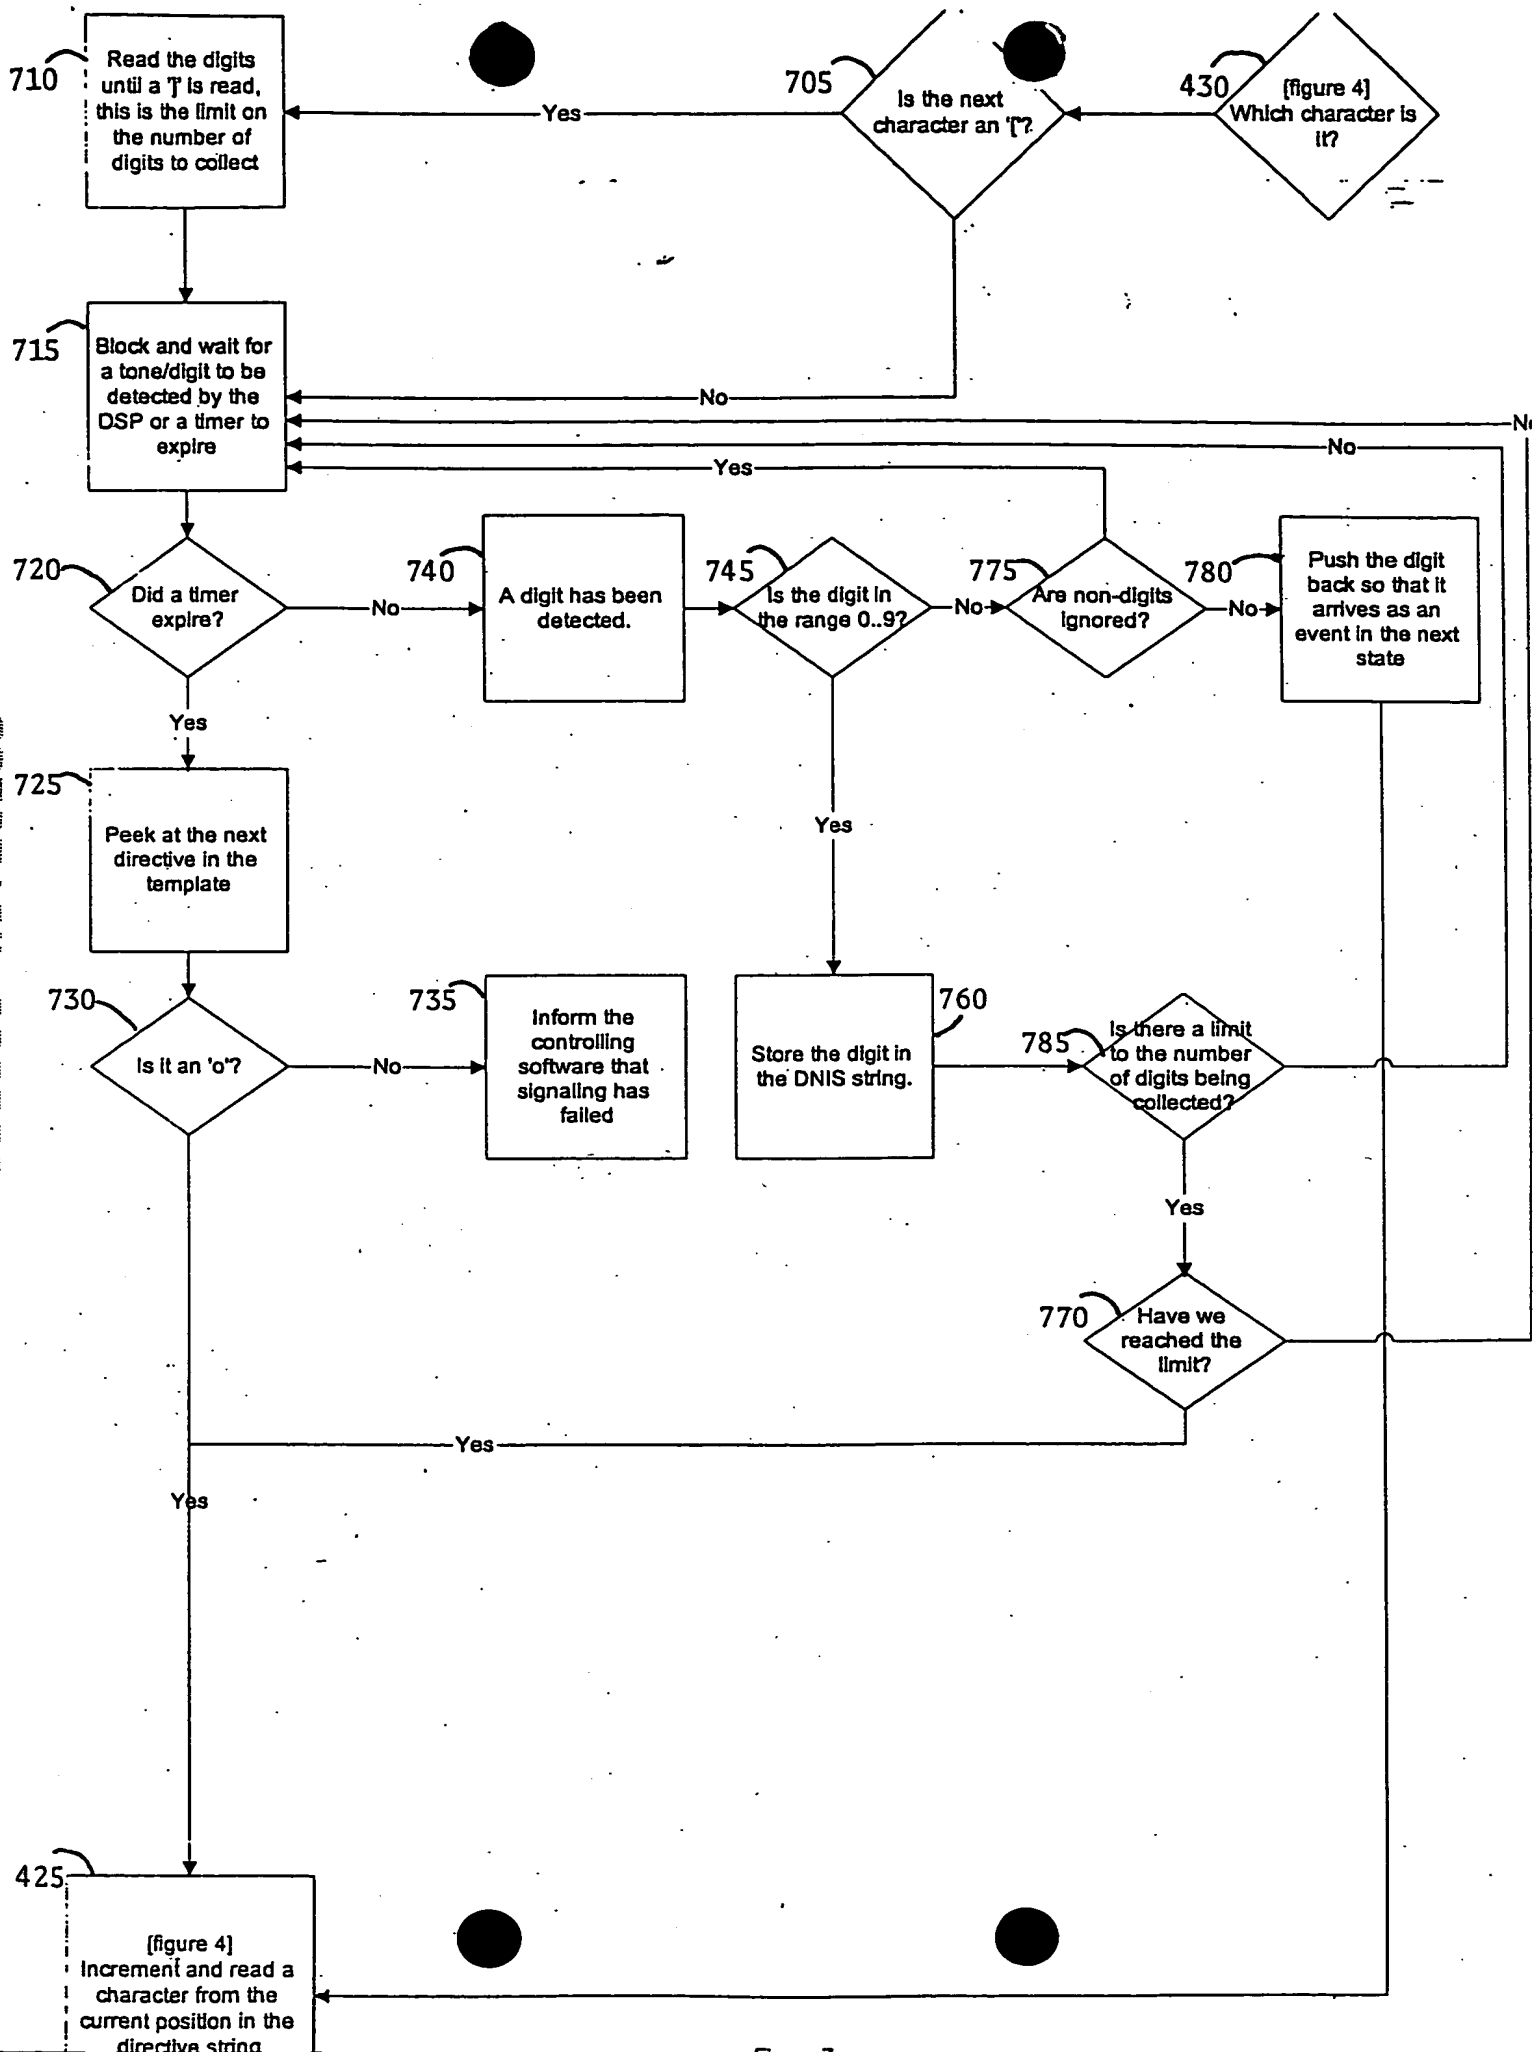

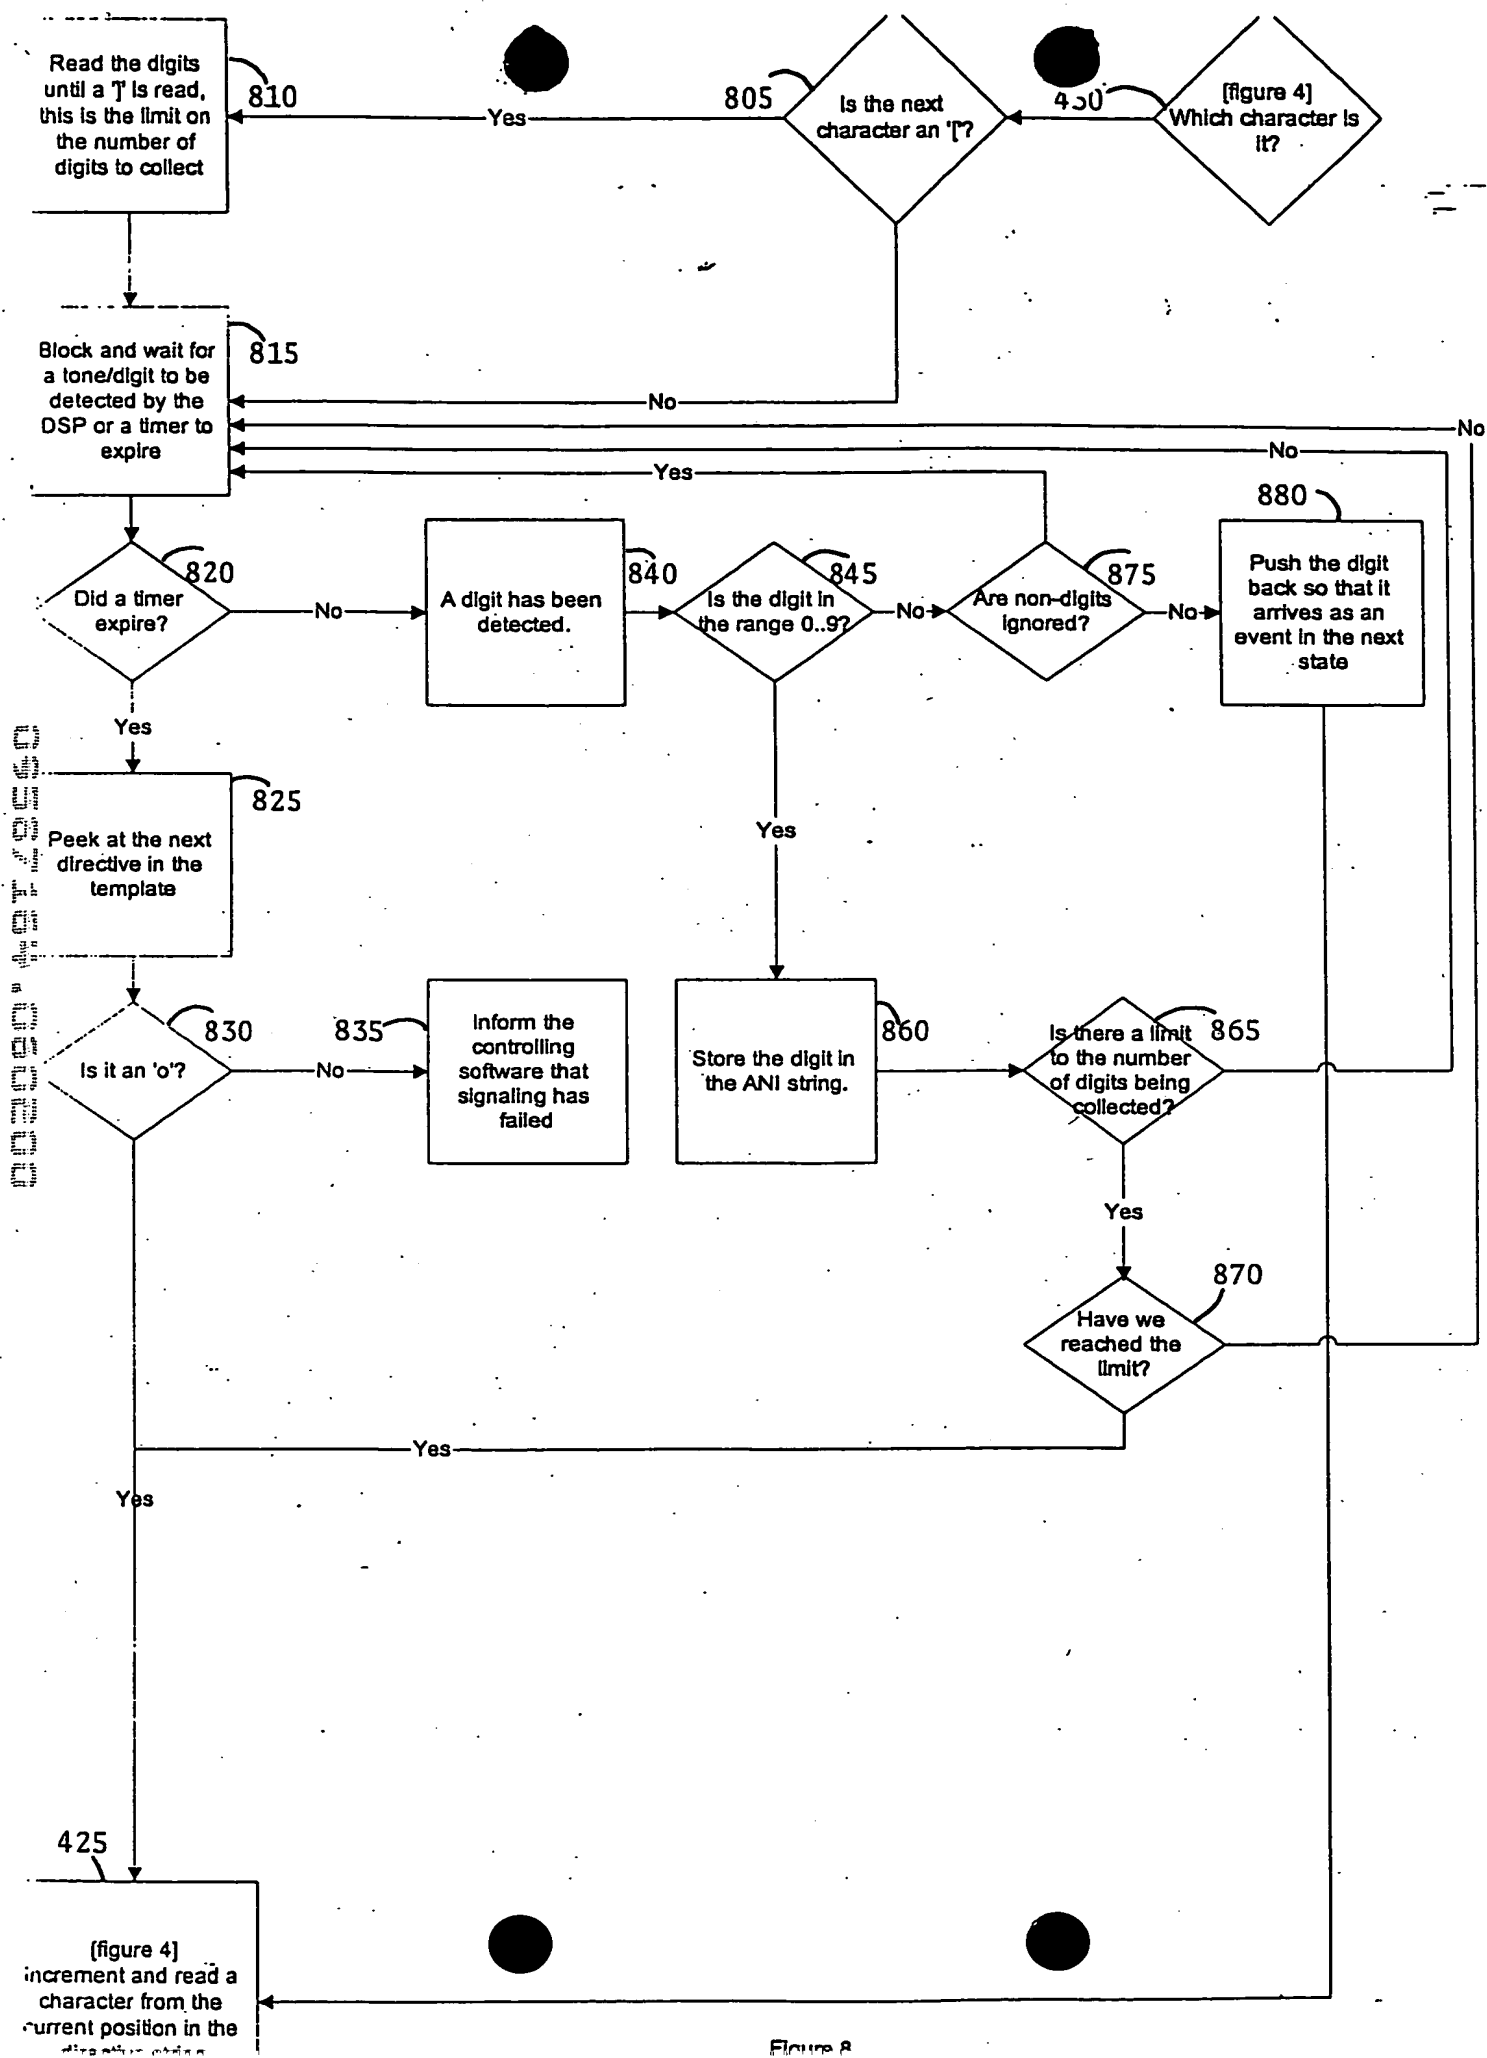


Figure 8

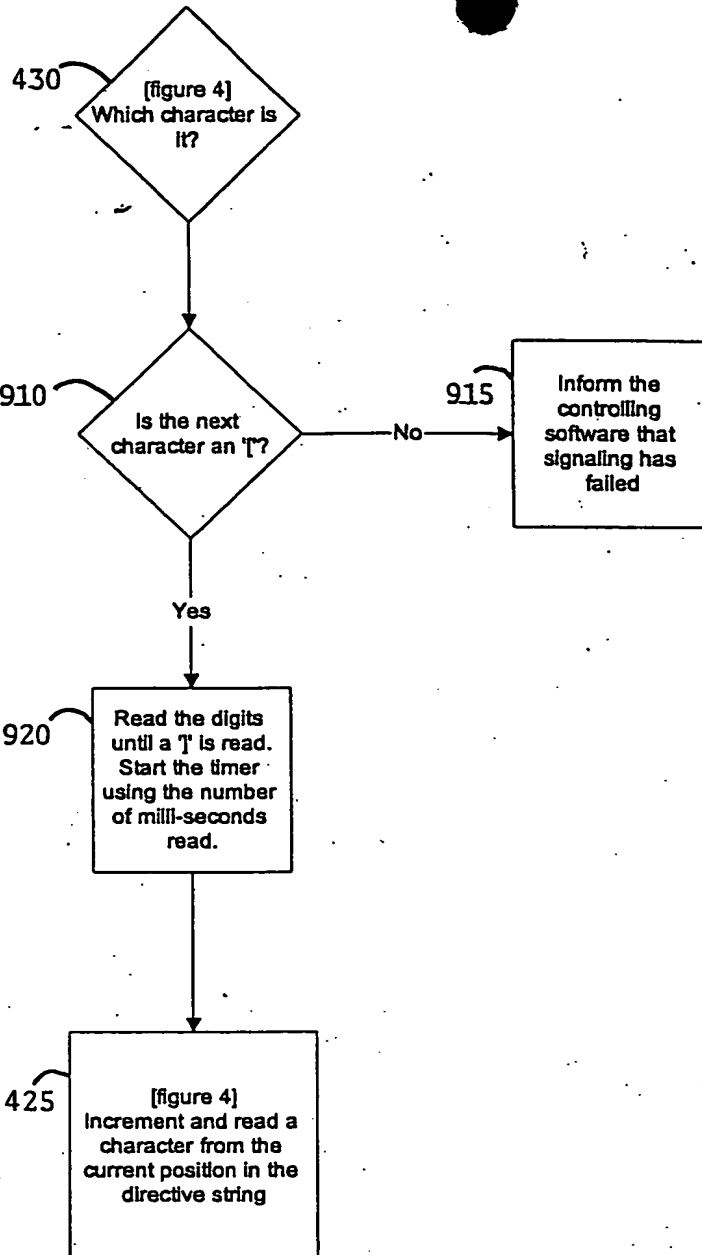


Figure 9